



Removing the discharge protector


Prior to first usage please proceed as follows:



Slide the battery compartment lid open.




Remove the battery and discharge protection.




Install the battery and close the battery compartment lid.

Battery status display


› Ready for operation



Solid green light:
The rechargeable battery is fully charged.




Solid yellow light:
The rechargeable battery is half-charged.




Solid red light:
The rechargeable battery is almost empty.

› Empty battery




Flashing red light: The rechargeable battery needs to be charged.

› Loading battery




Battery status display


› Charge battery



Flashing red light:
The rechargeable battery is
<5% charged.



Flashing yellow light:
The rechargeable battery is
5-60% charged.




Flashing green light:
The rechargeable battery is
60-99% charged.

Speed control


The liquid aspiration speed is regulated continuously by controlling the pressure on the control buttons, i.e. how far in the button is pressed.

› Slow aspiration

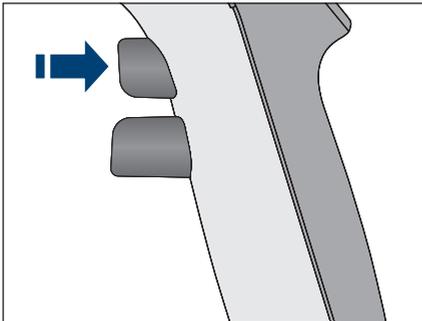

To slowly aspirate or dispense liquid,
press the corresponding control button lightly.

› Quick aspiration

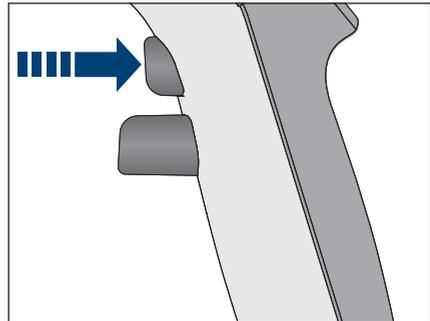

To quickly aspirate or dispense liquid,
press the corresponding control button firmly.